



i6300 Accessories Brochure

All Accessories



Power Adapter



USB Cable



Standard Cradle




Scan Trigger Handle with Charger



Protective Boot with Handle Strap



Cradle for Scan Trigger Handle (only for TRPW-620)

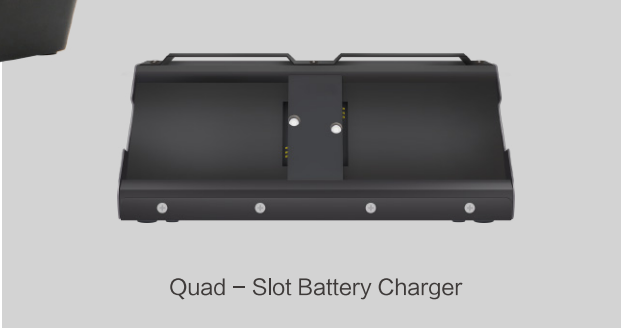

Quad – Slot Battery Charger



Lanyard



Stylus

Standard Accessories



Power adapter

- Applicable for charging device with country specific plugs.
- Input : 100–240V–50/60Hz 0.4A
- Output : 5V/1.5A



USB Cable

- Applicable for charging and data transmission
- Interface : Micro–USB



Battery

- Polymer Li-ion Battery
- Model : HBL6300
- 3.8V/4000mAh/15.2Wh
- Hours of Operation: more than 10 hours
- Charging time: Less than 4 hours.

Optional Accessories

Single Slot Cradle with Battery Charger

Charge one device and one battery simultaneously

- Input : 5V/2.6A
- Interface : DC Jack / Micro-USB
- Life cycle : 5000 times



Power adapter (Cradle)

- Applicable for charging device with country specific plugs.
- Input: 100-240V-50/60Hz 0.4A
- Output: 5.5V/2.6A



Protective Boot with Handle Strap



- Specially designed for mobile applications
- Improve protection performance
- Adjustable elastic wristband



Scan Trigger Handle with Charger

Super Ergonomic design, specially designed for high-intensity scanning work.

- Built-in 4500mAh battery, mobile charging, meeting long working hours.
- Removable, easy to install and disassemble.
- Support i6200 Series only



LED Indicator Status



Discharge State

LED Status	Electricity Status
red light flashing	0%–5%
red light long	5%–25%
yellow light long	26%–75%
green light long	≥76%

Charge State

LED Status	Electricity Status
red light flashing	0%–25%
yellow light flashing	26%–75%
green light flashing	≥76%
green light long	≥76%

Cradle for Scan Trigger Handle



Power LED: Green(Power)

DC PIN


Handle Slot

(only for TRPW-620)

- Input : 5VDC 2.6A
- Interface : DC Jack

Quad – Slot Battery Charger

- Simultaneously charges up to 4 battery.

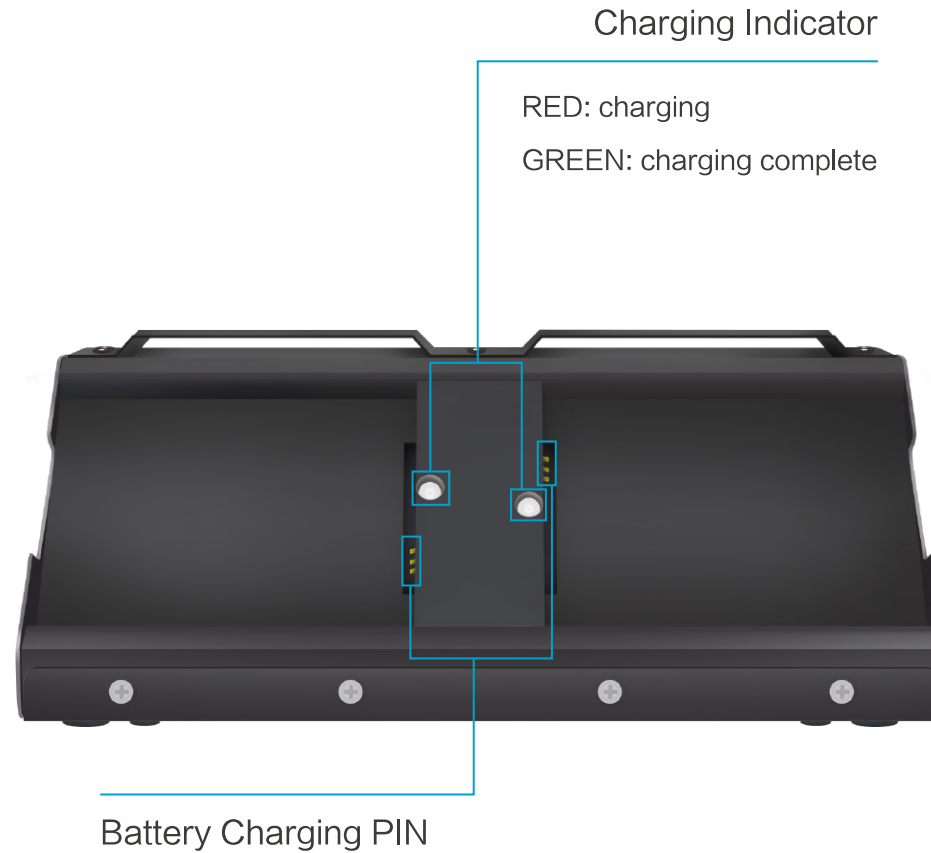

Power Supply

Model	ZAC-A050330A-04
Input	100-240 V ~ 50-60Hz
Output	12V/3.3A

Environment

ChargingTemperature	0° C to +45 C
StorageTemperature	-20° C to +70° C
Humidity	5% - 95% (non-condensing)



Stylus

- Offers convenient touch screen experience .



- Easy to carry and prevent falling

Lanyard